

Z:\2023 FBC Drawings\FISO Door\FL-46579\FL-46579.2.dwg




METAL BUILDING SERIES STEEL DOOR & FRAME OUTSWING "IMPACT"


GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
4. The steel door and support frame are shown (as tested). The steel frame is part of the support structure and shall be designed by the architect or engineer of record and submitted to the permitting jurisdiction for review and approval.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevations, design pressures, & general notes
2	Door panel details
3	Elevation
4	Horizontal cross section
5	Vertical cross sections
6	Horizontal cross sections
7	Frame anchoring
8	Components
9	Bill of materials

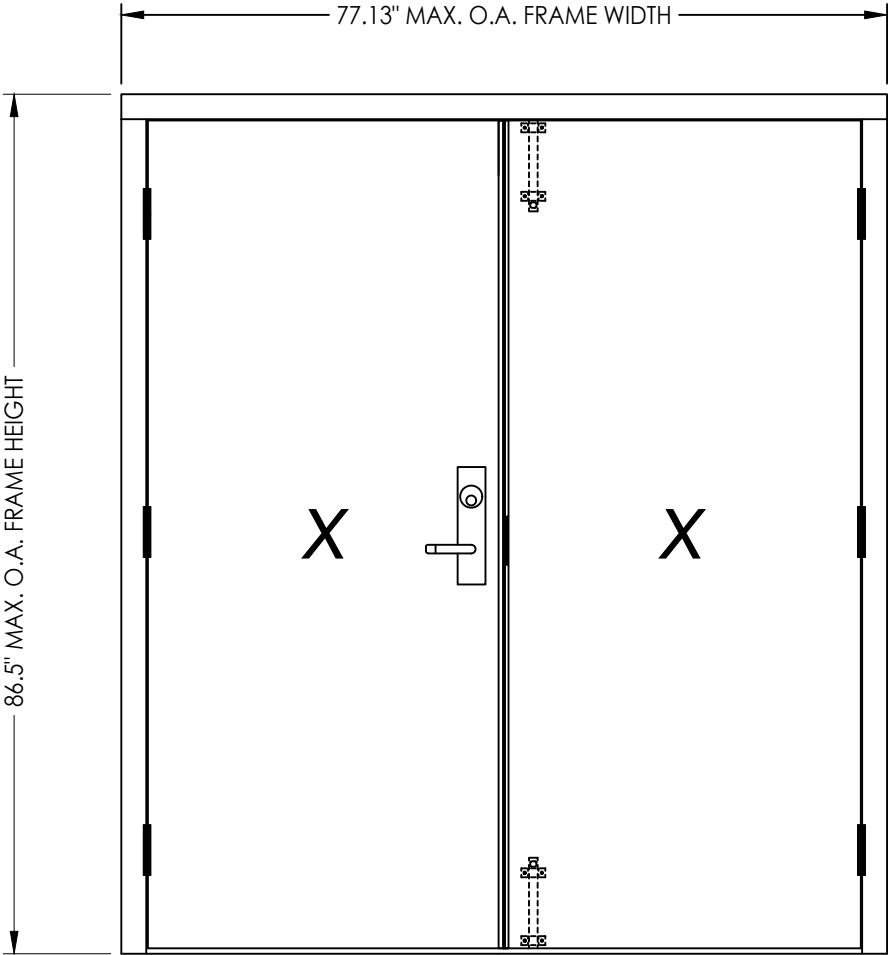

MAX. OVERALL DIMENSION	LOCK HARDWARE	DESIGN PRESSURE (PSF)	
		POSITIVE	NEGATIVE
77.13" X 86.5"	MORTISE LOCK & SURFACE BOLTS	+50.0	-50.0

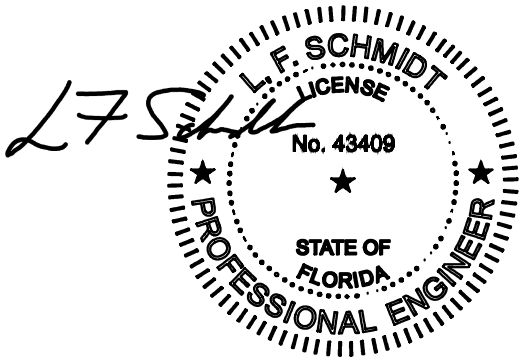

This item has been digitally signed and sealed by L. F. Schmidt, P.E. on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT: FISO DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATIONS, DESIGN PRESSURES & GENERAL NOTES

DATE: 2/28/24

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS

DRAWING NO.: FL-46579.2

SHEET 1 OF 9

REVISIONS


NO. DATE BY

RW BUILDING CONSULTANTS, INC.




P.O. Box 230, Valrico, FL 33595

Phone No.: 813.659.9197

FBPE Registry No. 9813

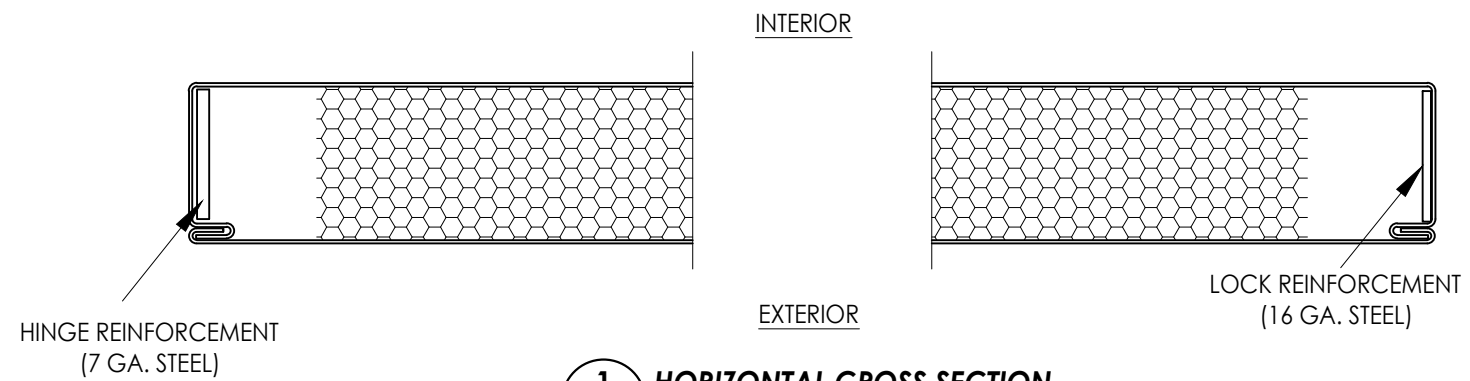


1 HORIZONTAL CROSS SECTION

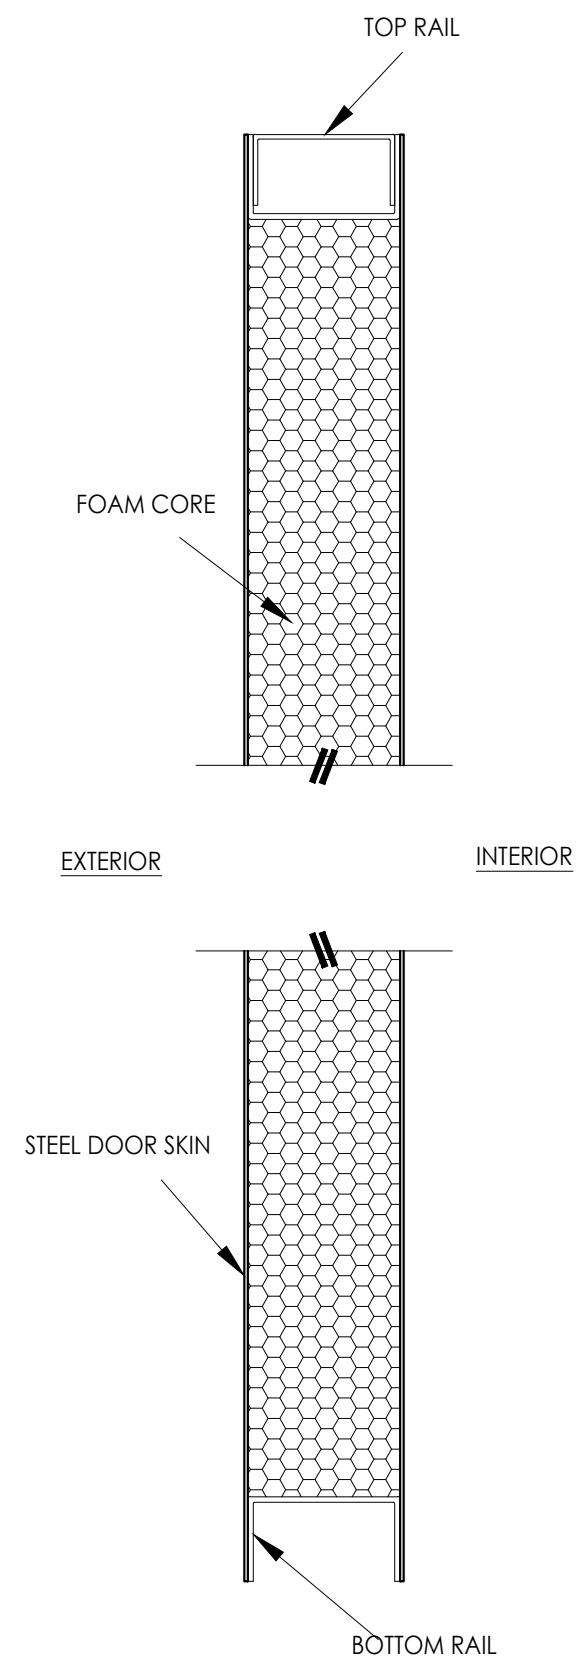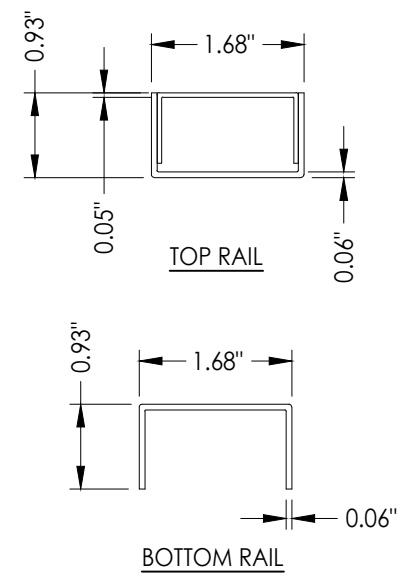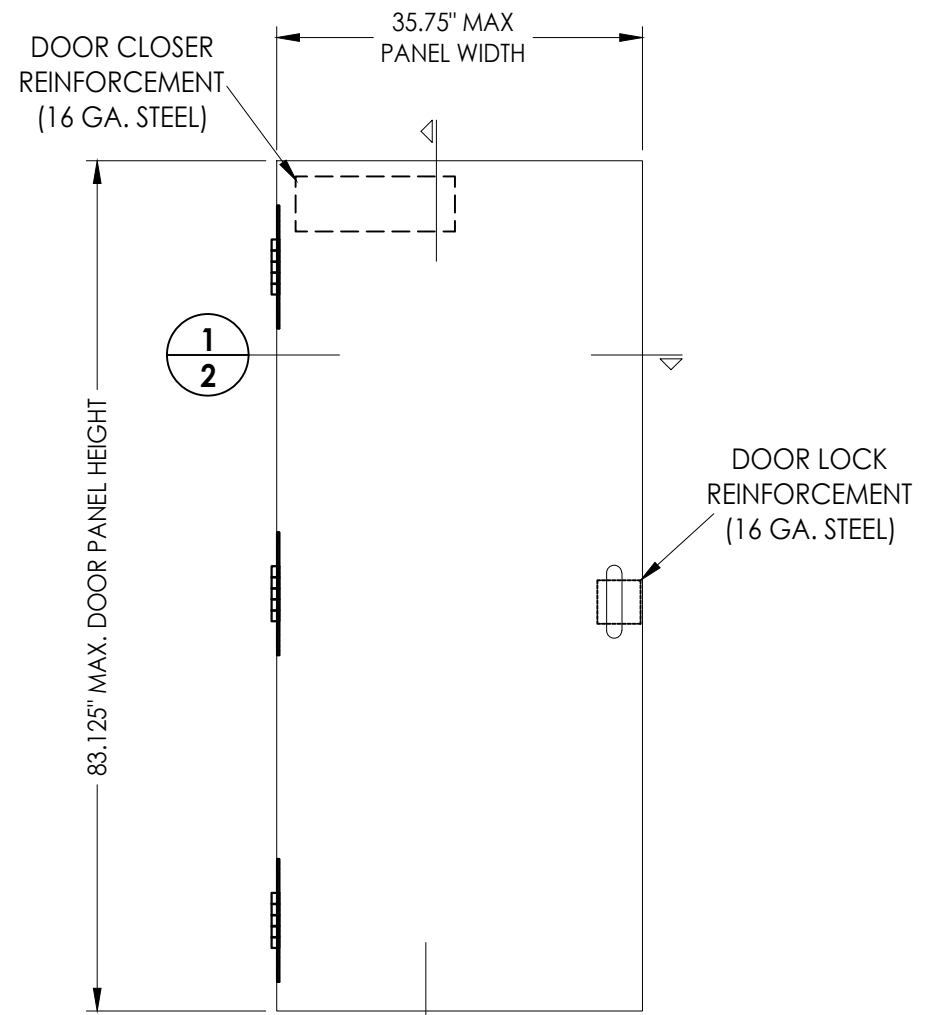

2 VERTICAL CROSS SECTION

DOOR STEEL SKIN: 20 GA. (0.039" THK. STEEL)
FOAM CORE: POLYSTYRENE

[illegible]

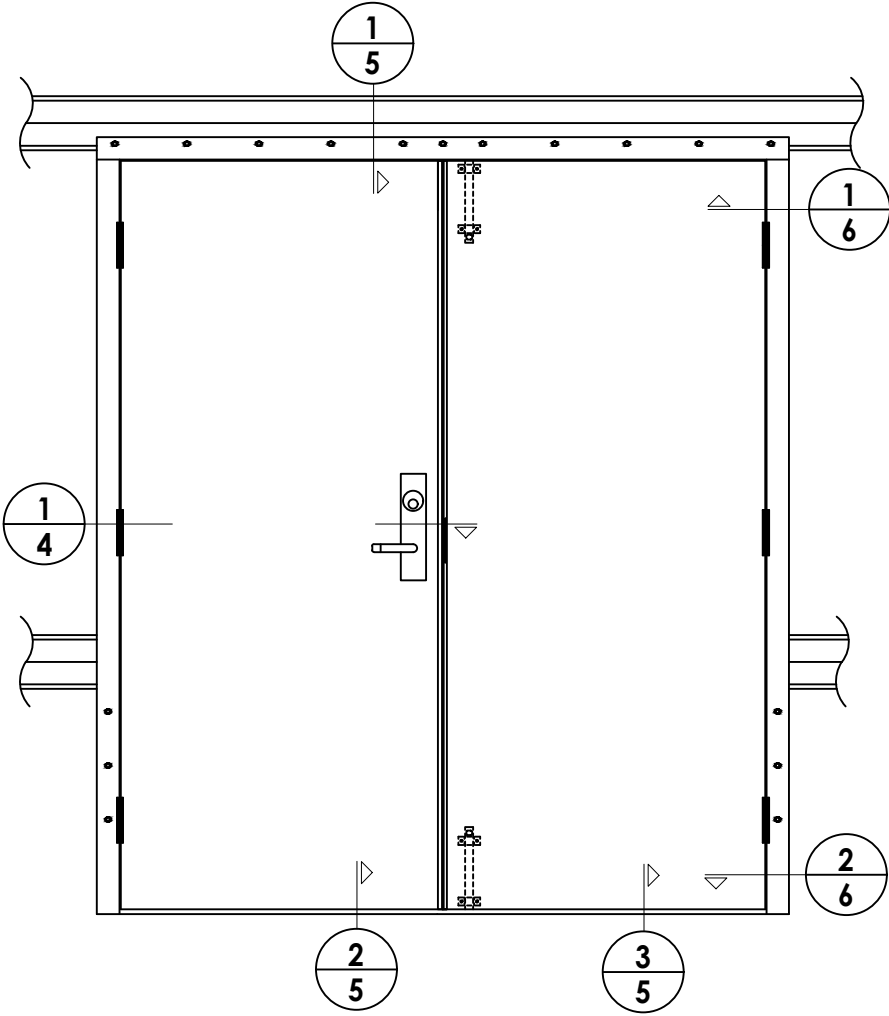

LOCK HARDWARE

MORTISE LOCK:
CAL ROYAL "NM" SERIES (NM8050)

NOTE: STEEL DOOR & FRAME ARE SHOWN AS TESTED.
ALL SUPPORT FRAMING AND CONNECTIONS ARE TO
BE DESIGNED BY THE ARCHITECT OR ENGINEER OF
RECORD.

[illegible]

PRODUCT: _____

FISO DOOR

PART OR ASSEMBLY:


ELEVATION

1	
---	--

REVISIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

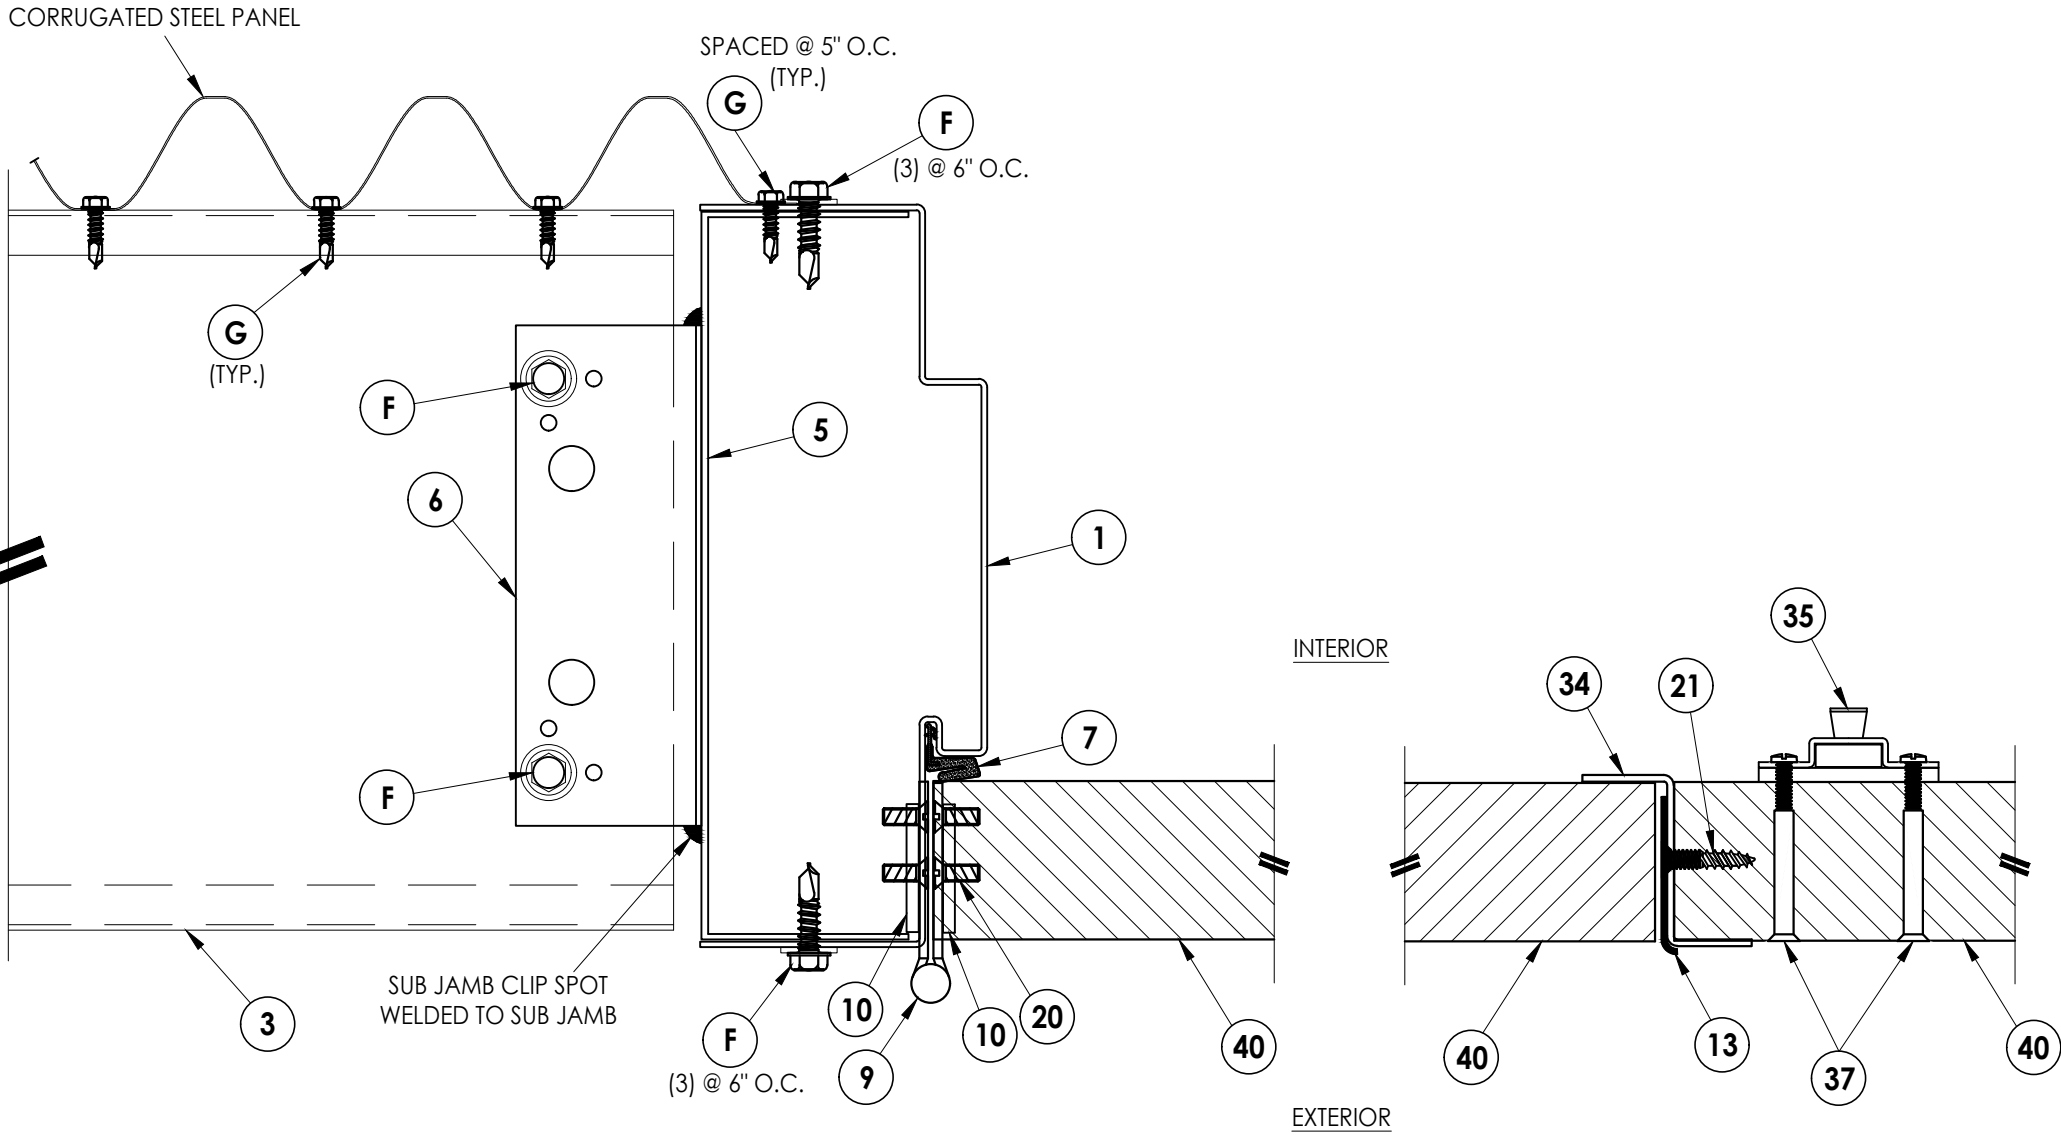

1 **HORIZONTAL CROSS SECTION**
4




[illegible]

DATE:	2/28/24
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-46579.2
SHEET	4 OF 9

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\FISO Door\FL-46579\FL-46579.2.dwg

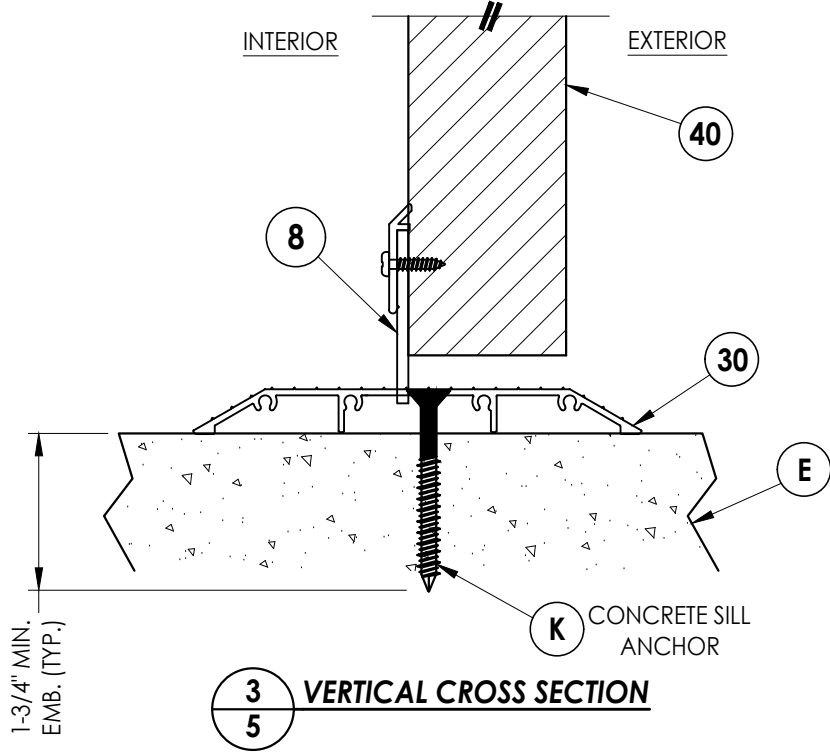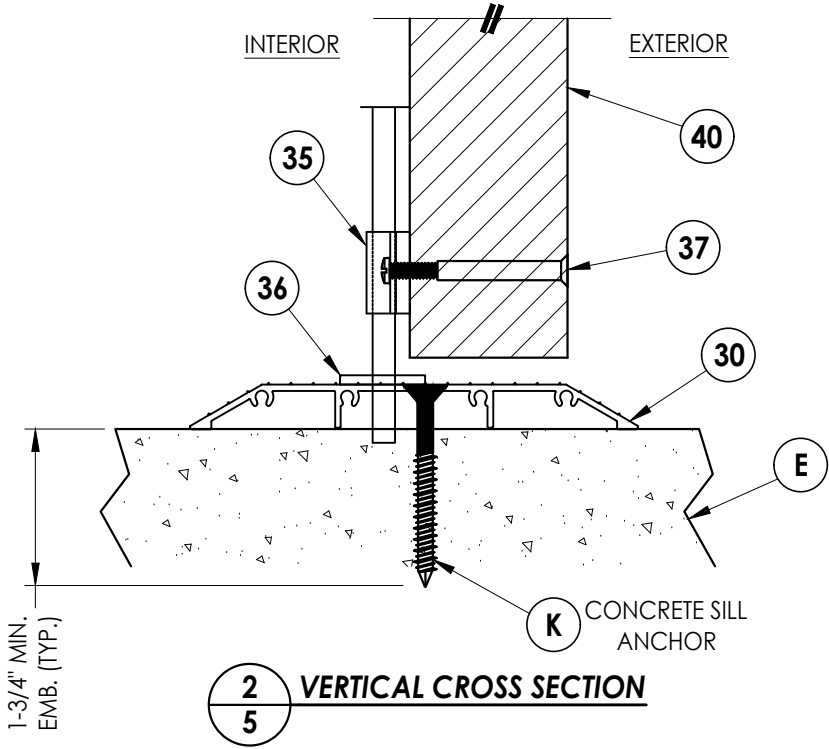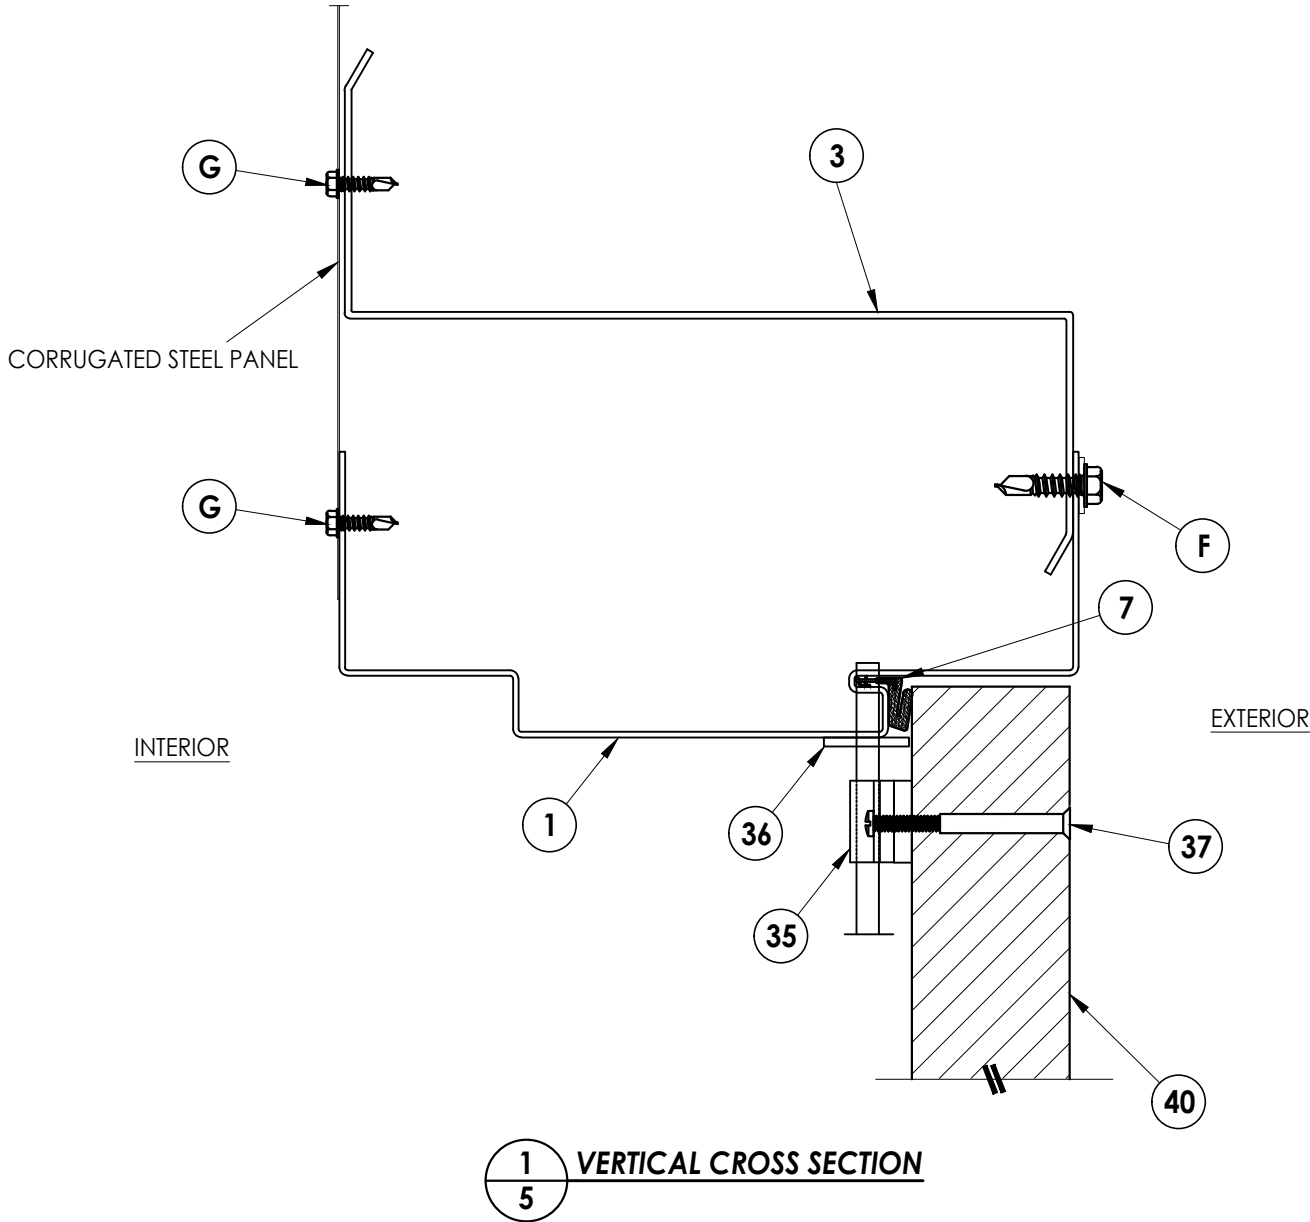

DATE: 2/28/24
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-46579.2
SHEET 5 OF 9

PRODUCT:

FISO DOOR

PART OR ASSEMBLY:

VERTICAL
CROSS SECTIONS



BY

NO. DATE

REVISIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

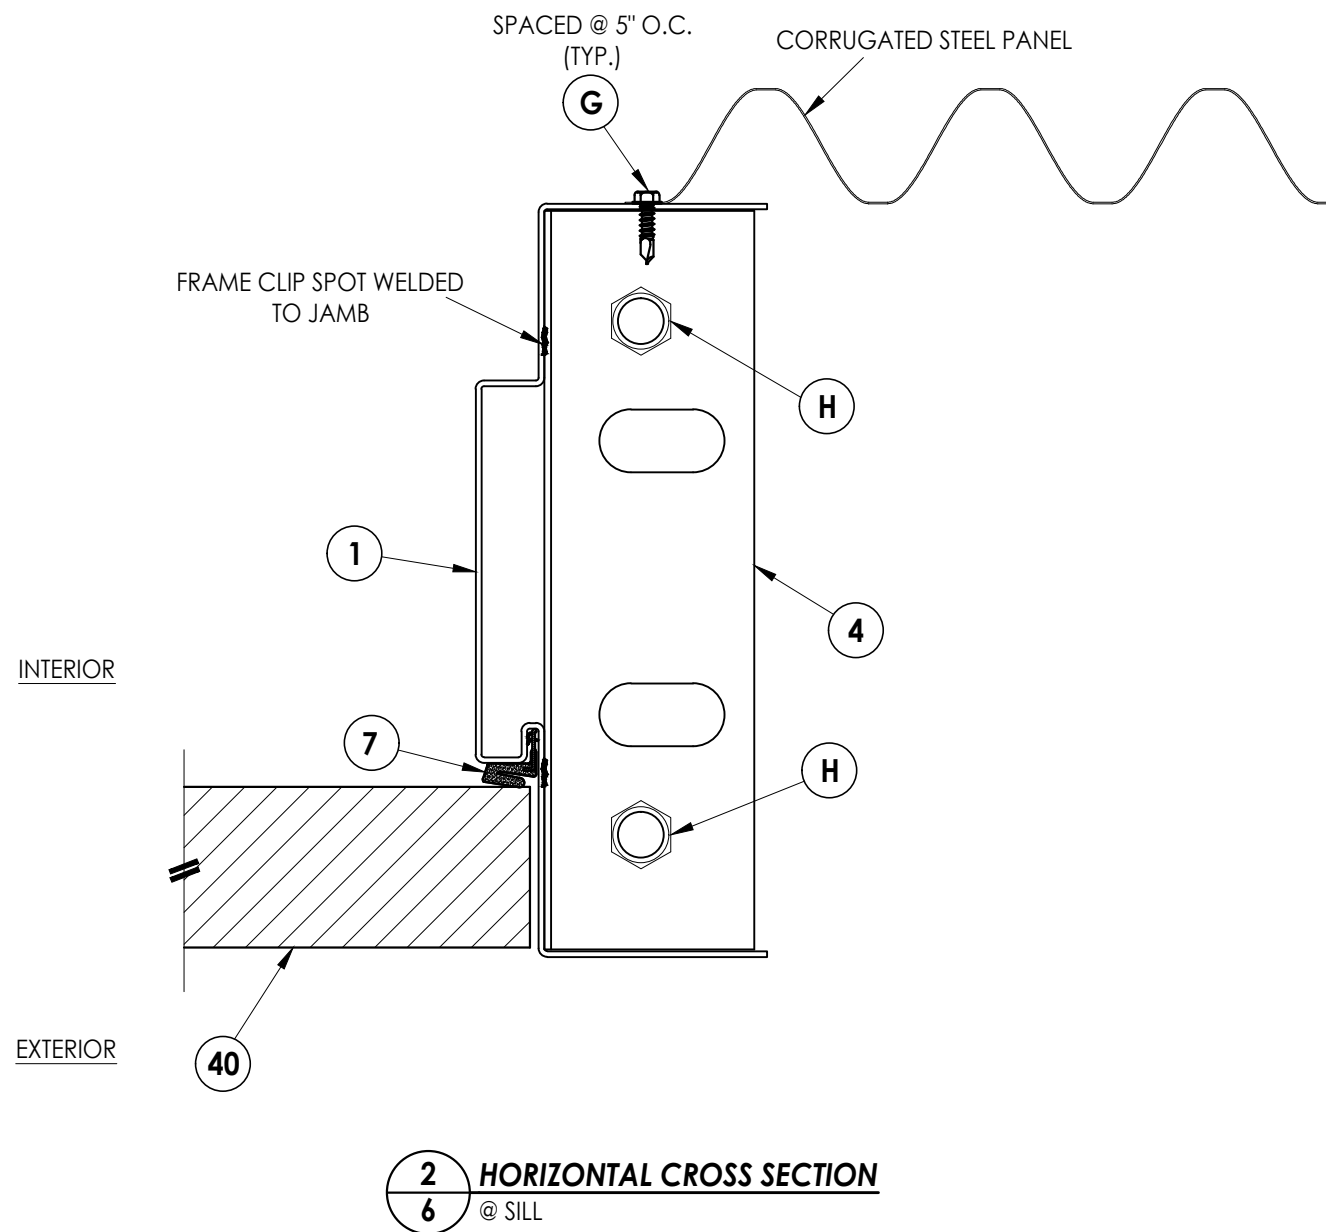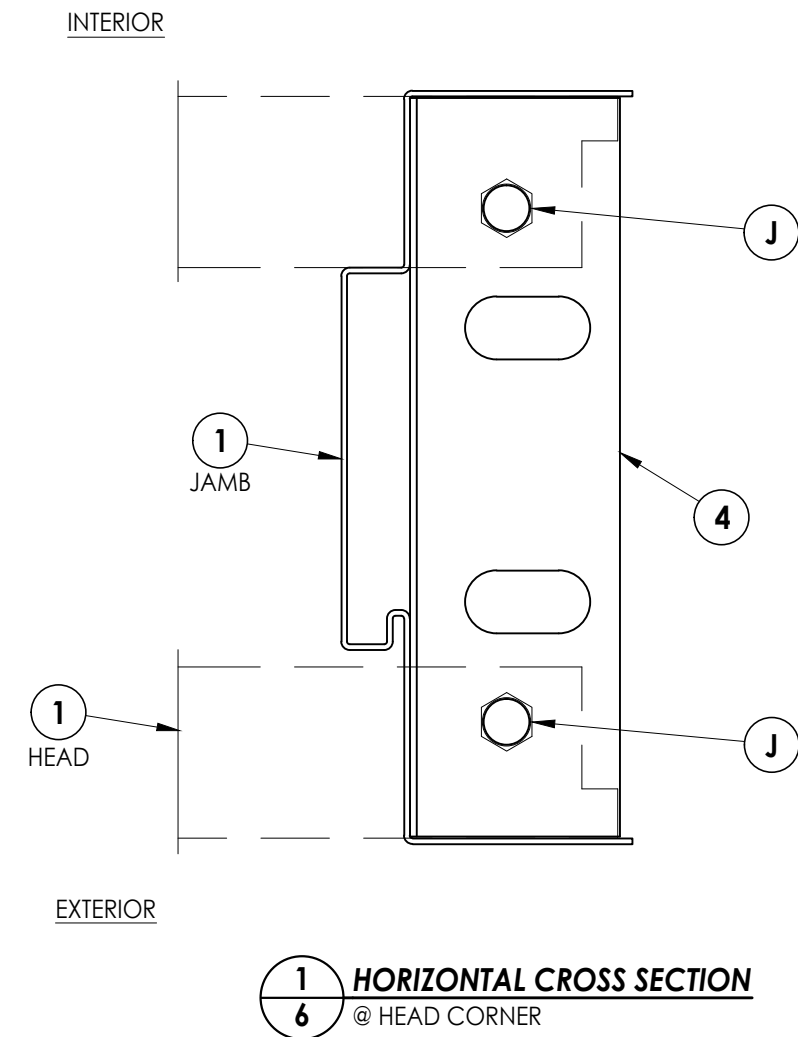[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\FISO Door\FL-46579\FL-46579.2.dwg

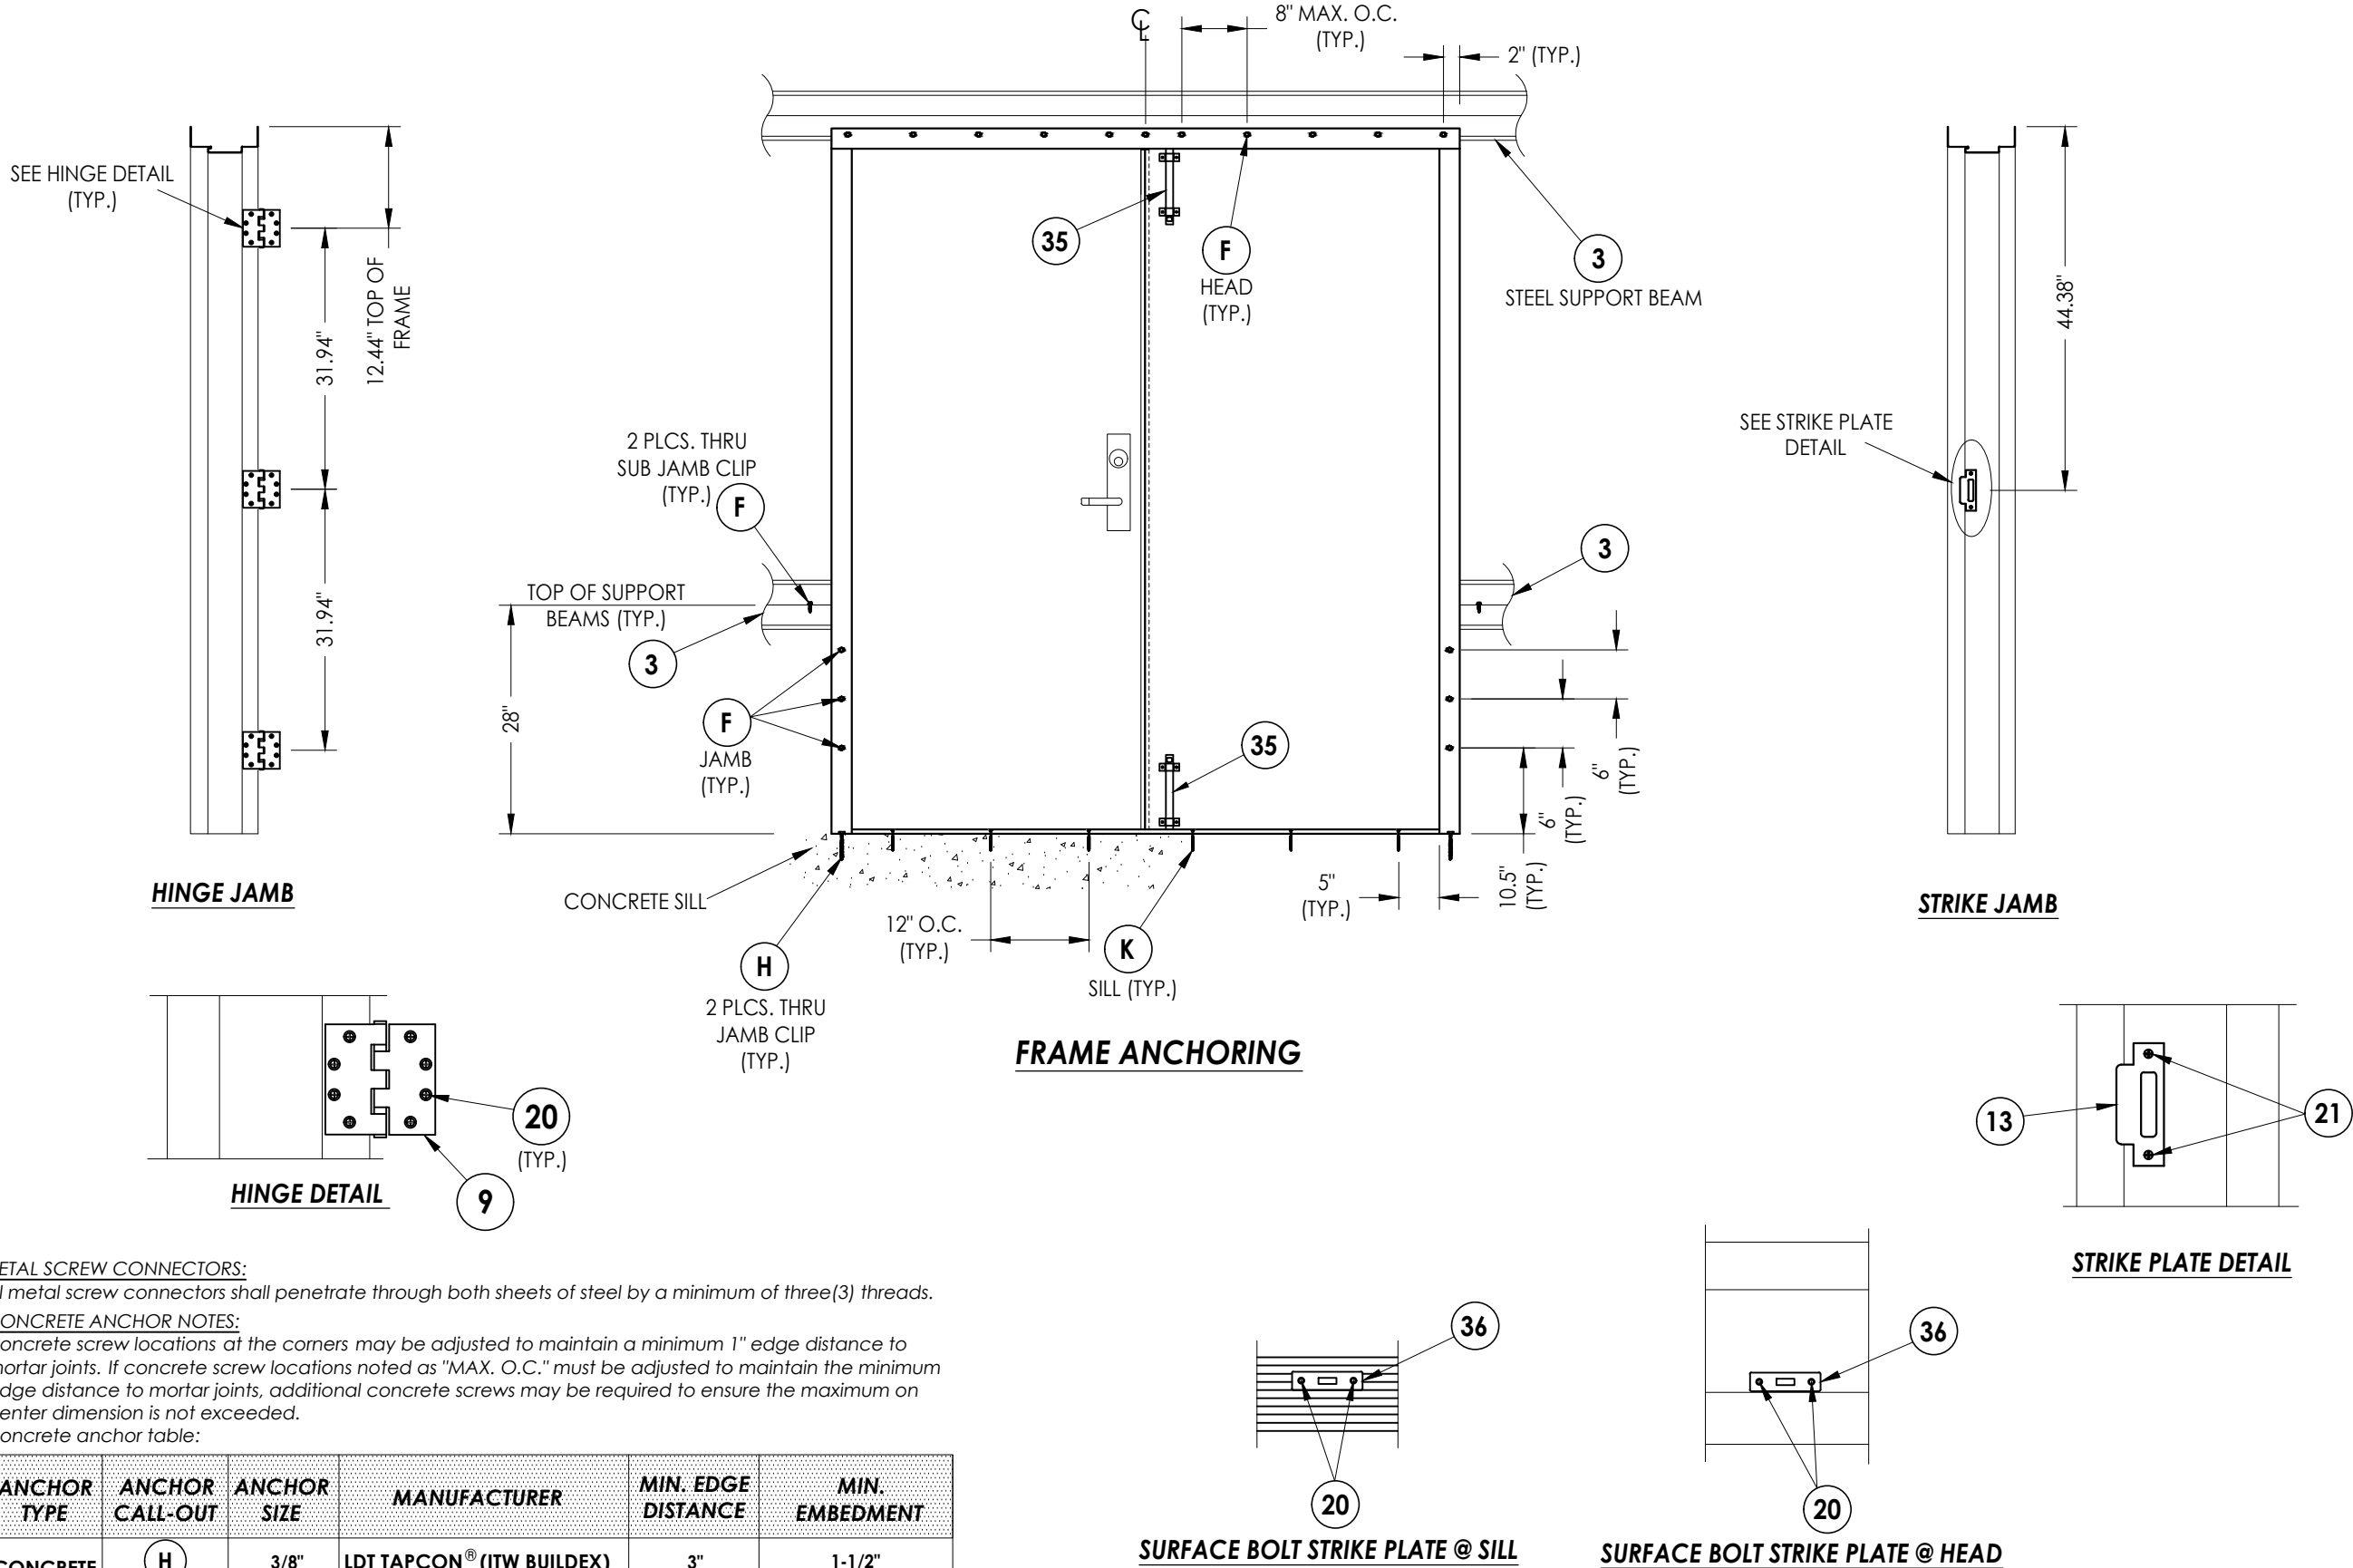


- METAL SCREW CONNECTORS:**
All metal screw connectors shall penetrate through both sheets of steel by a minimum of three(3) threads.
- CONCRETE ANCHOR NOTES:**
- Concrete screw locations at the corners may be adjusted to maintain a minimum 1" edge distance to mortar joints. If concrete screw locations noted as "MAX. O.C." must be adjusted to maintain the minimum edge distance to mortar joints, additional concrete screws may be required to ensure the maximum on center dimension is not exceeded.
 - Concrete anchor table:


ANCHOR TYPE	ANCHOR CALL-OUT	ANCHOR SIZE	MANUFACTURER	MIN. EDGE DISTANCE	MIN. EMBEDMENT
CONCRETE ANCHOR SCREW	H	3/8"	LDT TAPCON® (ITW BUILDEX)	3"	1-1/2"
	K	1/4"	TAPCON® (ITW BUILDEX) ULTRACON+® (DeWALT)	2-1/2"	1-3/4"

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: FISO DOOR		PART OR ASSEMBLY: FRAME ANCHORING	
NO.		DATE	
BY		REVISIONS	
DATE: 2/28/24			
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-46579.2			
SHEET 7 OF 9			


Z:\2023 FBC Drawings\FISO Door\FL-46579\FL-46579.2.dwg

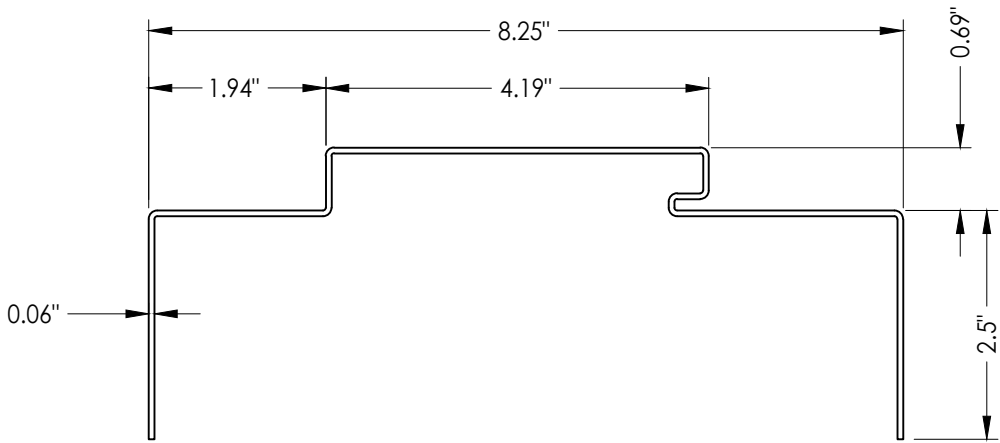


1 FRAME
16 GA.

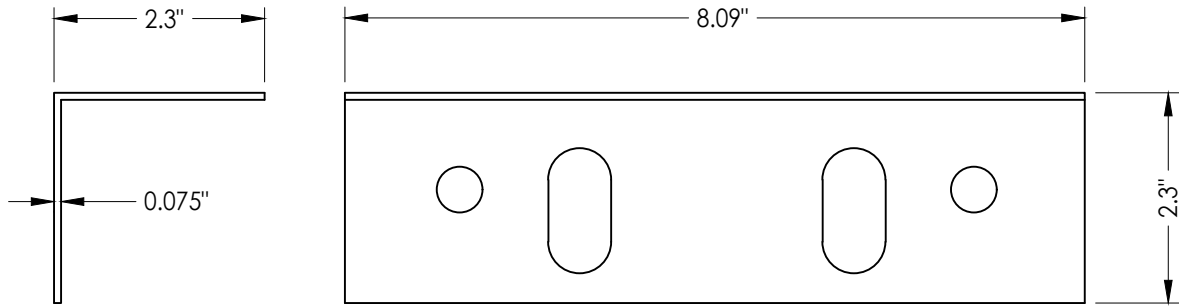


4 FRAME CLIP
14 GA.

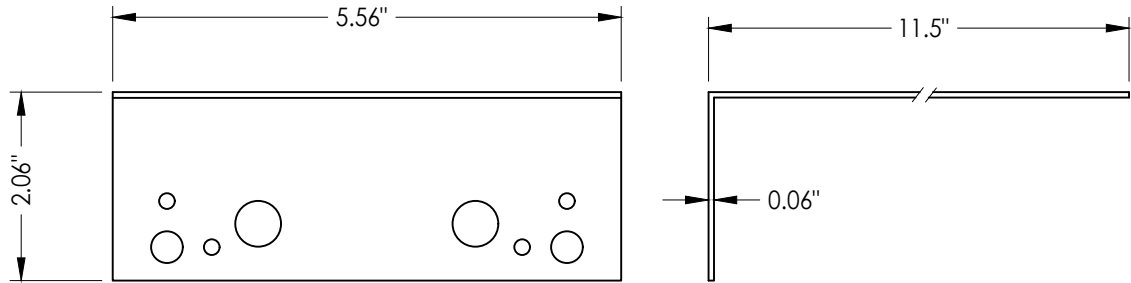


6 SUB JAMB CLIP
16 GA. - 11.5" LONG

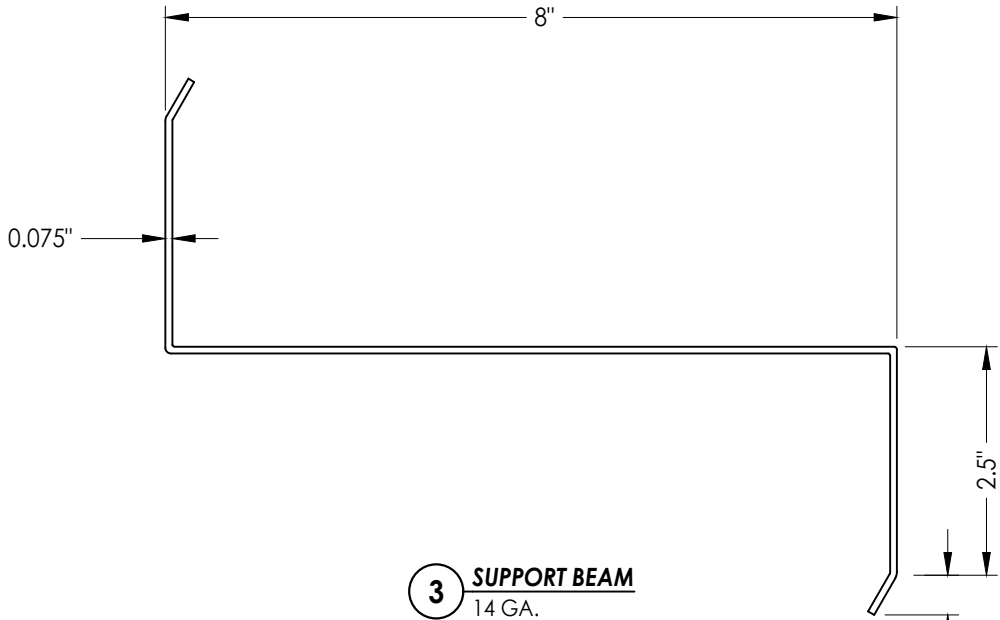


3 SUPPORT BEAM
14 GA.

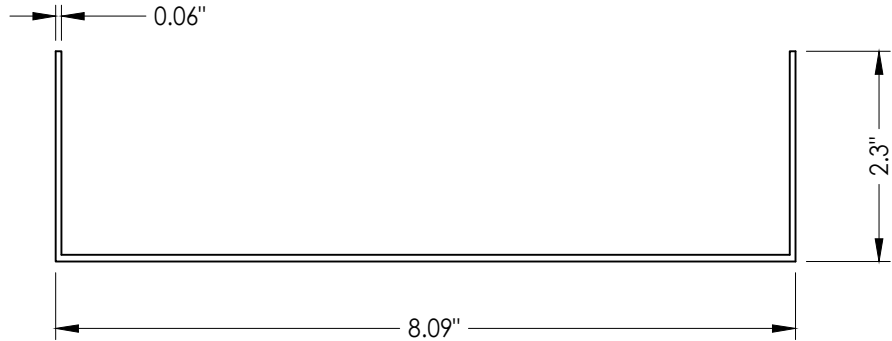

5 SUB JAMB
16 GA. - 16" LONG

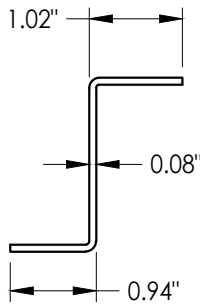

34 Z-ASTRAGAL BAR

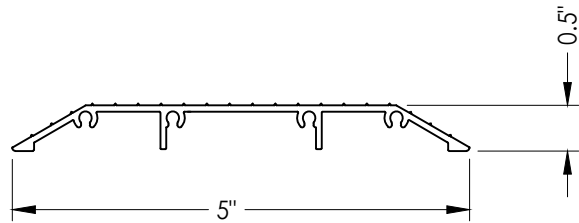

30 OUTSWING ADA THRESHOLD

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				R.W. BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: FISO DOOR		PART OR ASSEMBLY: COMPONENTS		REVISIONS			
				NO.	DATE	BY	
DATE: 2/28/24							
SCALE: N.T.S.							
DWG. BY: RW							
CHK. BY: LFS							
DRAWING NO.: FL-46579.2							
SHEET 8 OF 9							

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301	CONCRETE
F	14-14 X 1" HWH SELF-DRILLING TEK SCREW w/ 5/8" WASHER	STEEL
G	10-14 X 3/4" HWH SELF-DRILLING TEK SCREW	STEEL
H	3/8" Ø X 3" LDT TAPCON CONCRETE SCREW (SEE CONCRETE ANCHOR TABLE)	STEEL
J	3/8" Ø X 1-1/4" THRU BOLT w/ NUT	STEEL
K	1/4" X 2-1/4" PFH DeWALT OR ITW BUILDEX CONCRETE SCREW (SEE CONCRETE ANCHOR TABLE)	STEEL
1	FRAME (16 GA. - A60 GALVANNEALED STEEL)	STEEL
3	SUPPORT BEAM (14 GA.)	STEEL
4	FRAME CLIP (14 GA.)	STEEL
5	SUB JAMB (16 GA. - A60 GALVANNEALED STEEL)	STEEL
6	SUB JAMB CLIP (16 GA. - A60 GALVANNEALED STEEL)	STEEL
7	WEATHERSTRIP	-
8	DOOR SWEEP	VINYL
9	4.5" X 4.5" HINGE	STEEL
10	HINGE REINFORCEMENT (7 GA.)	STEEL
13	MORTISE LOCK STRIKE PLATE	STEEL
20	12-24 X 1/2" FLAT HEAD MS	STEEL
21	12-24 X 1" COMBINATION MACHINE / WOOD SCREW	STEEL
30	OUTSWING ADA THRESHOLD	ALUM/COMP
34	"Z" ASTRAGAL BAR	STEEL
35	SURFACE BOLT - IVES SB453 - 8" LONG	STEEL
36	SURFACE BOLT STRIKE PLATE	STEEL
37	10-24 FH SEX BOLT	STEEL
40	STEEL DOOR PANEL	-

DATE: 2/28/24		REVISIONS	
SCALE: N.T.S.			
DWG. BY: RW			
CHK. BY: LFS			
DRAWING NO.: FL-46579.2			
SHEET 9 OF 9			
NO.	DATE	BY	
PART OR ASSEMBLY:			
FISO DOOR			
PRODUCT:			
Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409			
<i>RW</i> BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			